

Hose and cable reels

– Top performance, durable design and easy to use





For professional use in industrial environments.

Meeting the needs of professional working environments

– Efficiency, ease of use and durability.

CEJN is renowned worldwide for its quick-connect solutions. Within the pneumatic segment, we are probably best known for our high flow – low pressure drop products. Regardless of segment – pneumatics, hydraulics, fluids or breathing air – all our products are based on functional design and extensive testing based on genuine usability conditions, ensuring exacting standards, long service life and low maintenance costs.

With experience from different segments and a wide range of applications and their individual demands, we know what is needed in each case – from reliable equipment that helps improve efficiency to products that improve energy savings.

Our corner stones – functional, reality based design and thorough testing – are used for developing CEJN hose and cable reels to match the demanding requirements of a modern workplace.

The distinct blue color and the hexagon shape sends a clear quality signal of high flow rate, low pressure drop and a sturdy construction. Designed and produced in Sweden, CEJN Hose and cable reels are the high quality choice for industries and workshops that want the best professional option on the market.



CEJN reels for pneumatic hoses, water hoses and electric cables, available in a variety of sizes.



CEJN

Encased housing for prolonged service life.

A low pulling force makes the hose easy to roll out.

IMPROVED FEATURE

Efficient tool use with high flow performance.

Keeps work places clean and tidy and the tools always handy.



Easy to install.

Move around freely and perform work where it's needed.

Adjustable spring force.

Development with industrial reality in mind

– Making work spaces work better

Industrial working environments are often tough. The pace is high and everything has to work at all times. Equipment must withstand wear and tear from continuous use while constantly performing at high efficiency to maintain optimal productivity. Our well balanced hose and cable reels offer many benefits in providing a clean and efficient work space.

Our solutions

– *Quality in every detail*

REEL AND SPRING ASSEMBLY

The reel and spring assembly is designed, dimensioned and tested to withstand continuous unrolling and retracting of the hose. The design also allows for the spring force to be adjusted and adapted to different weight and balance requirements.

ANGULAR FEEDER HOSE CONNECTION

An optimized flow geometry in the new angular feeder hose connection provides a substantial increase in flow rate and minimizes pressure drop. The new design also features an improved hose attachment. The metal clip keeps the hose firmly in place while making it easier to attach and detach the hose when needed.

HOUSING

The sturdy exterior housing, made in durable plastic, protects the hose and the reel mechanism from dirt and debris. The housing is designed to withstand repeated blows from the stop ball or other objects in the working environment. The wide opening of the housing makes retraction smooth and easy in all environments.



KINK PROTECTOR

The kink protector protects the hose end from wear and tear. The non-corrosive spring is placed just where it's needed to make sure the operator is protected in case of hose rupture.

AXLE AND SWIVEL

The improved flow geometry in the axle is the key for creating the significant improvement in flow rate. The new design of the axle and swivel means increased inner dimensions which together with the new hose connection design optimized the flow geometry.

STOP BALL

The stop ball, which hinders the hose from retracting too far into the reel, can be placed anywhere to adapt to the mounting height, making the hose and tool easy to reach.



CEJN QUICK-LOCK

Easy and simple installation with the new quick-lock feature. Position the guide bolt in the bracket (1) and push the locking plate in place to secure the reel (2). To remove the reel just push the locking plate to its unlocked position and push down the guide bolt.



Performance

Developed with top performance in mind, eliminating obstructions and improving the flow, the redesigned feeder hose connection, axle and swivel gives an improved flow rate. The result is an increased tool performance, which makes work more efficient, contributing to better economy. The improved flow could even allow for a smaller hose size, making the hose easier to handle, while the pressure stays the same and tool performance is secured.

Durability


The housing for our reels is impact resistant and easy to keep clean. The reel and spring assembly is tested to endure hours of hard use, unrolling and retracting the hose, over and over again.

Usability

Our reels swivel 300° making it possible to move around freely, performing all kinds of work. The reel only requires a low pulling force to adjust the hose to the position of the operator. The ability to adjust the spring force also contributes to efficient operation of the hose. The possibility to detach the reel from the mounting bracket makes installation and service quick and easy.


STREAM-LINE CONNECTION

The CEJN Stream-Line connections can be reused. Just dismount the Stream-line connection, cut the hose to the desired length and mount the air-tight connection back on again.



PLACEMENT

The reel is designed to be either wall or ceiling mounted.




Hose Reel – Compressed Air

Technical Data

Hose size (IDxOD mm) 6.5x10, 8x12, 9.5x13.5, 11x16
Hose Braided PUR
Reel diameter 330 mm, 430 mm
Feeder hose length 2 m (6.5 ft)
Max. working pressure Up to 16 bar (232 PSI)
Temperature range -20°C to +60°C (-4°F to +140°F)

- 19 911 501X
- 19 911 510X
- 19 911 10X0
- 19 911 512X
- 19 911 502X
- 19 911 513X

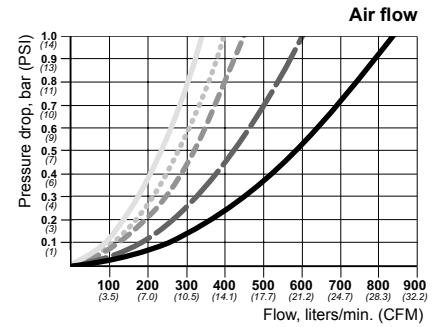

| | Length | Part No. | Size ID x OD | Connection | Diameter | Weight | Working Pressure |
|---------------------------------|--------|-------------|----------------|------------|----------|--------|------------------|
| Small reel | 7 m | 19 911 5020 | 8 x 12 mm | R 1/4" | 330 mm | 3.9 kg | 16 bar / 232 PSI |
| | 9 m | 19 911 5010 | 6.5 x 10 mm | R 1/4" | 330 mm | 3.9 kg | 16 bar / 232 PSI |
| Medium reel | 10 m | 19 911 1000 | 8 x 12 mm | R 1/4" | 390 mm | 5.5 kg | 16 bar / 232 PSI |
| Large reel | 10 m | 19 911 5130 | 11.0 x 16.0 mm | R 1/2" | 430 mm | 6.6 kg | 12 bar / 174 PSI |
| | 14 m | 19 911 5120 | 9.5 x 13.5 mm | R 1/4" | 430 mm | 6.6 kg | 12 bar / 174 PSI |
| | 16 m | 19 911 5100 | 8 x 12 mm | R 1/4" | 430 mm | 6.6 kg | 16 bar / 232 PSI |
| Large reel with anti-spark hose | 14 m | 19 911 5125 | 9.5 x 13.5 mm | R 1/4" | 430 mm | 6.6 kg | 12 bar / 174 PSI |


Flow capacity is measured at 6 bar (87 PSI) inlet pressure, and pressure drop at 0.5 bar (7 PSI). Working pressure is specified at 20°C (68° F). Thread connections are listed according to ISO Standards. Check with an authorized CEJN distributor for availability and prices.



Hose Reel – Water

Technical Data

Hose size (IDxOD mm) 9.5x13.5
Hose Braided PUR
Reel diameter 430 mm
Feeder hose length 2 m (6.5 ft)
Max. working pressure 9 bar (130 PSI) at 20°C (68°F), 7 bar (102 PSI) at 60°C (140°F)
Temperature range +5°C to +60°C (+41°F to +140°F)

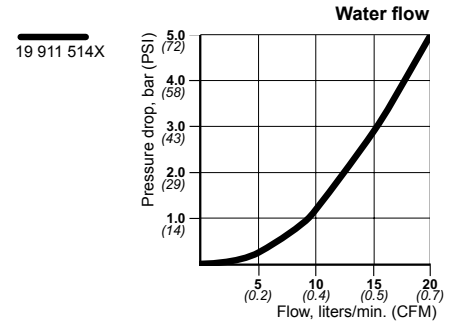

| | Length | Part No. | Size ID x OD | Connection | Diameter | Weight | Working Pressure |
|------------|--------|-------------|---------------|------------|----------|--------|------------------|
| Large reel | 14 m | 19 911 5140 | 9.5 x 13.5 mm | R 1/4" | 430 mm | 6.3 | 9 bar / 130 PSI |


Flow capacity is measured at 6 bar (87 PSI) inlet pressure, and pressure drop at 0.5 bar (7 PSI). Working pressure is specified at 20°C (68° F). Thread connections are listed according to ISO Standards. Check with an authorized CEJN distributor for availability and prices.



Cable Reels - Electrical

Technical Data

| | |
|------------------------|---|
| Cable..... | Rubber H07RN-F |
| Reel diameter..... | 330 mm, 430 mm |
| Current..... | 10 and 16 ampere |
| Voltage..... | 230 V |
| Connections..... | Schuko and CH plug |
| Power output..... | 1000 W (fully wound), 3500 W (fully unwound, 16 Ampere version) |
| Protection class..... | IP 23 |
| Temperature range..... | +5°C to +60°C (+41°F to +140°F) |




| | Length | Part No. | Dimensions | Connection | Diameter | Current | Voltage | Weight |
|------------|--------|-------------|-------------------------|-------------|----------|---------|---------|--------|
| Small reel | 10 m | 19 911 5050 | 3 x 1.5 mm ² | Schuko plug | 330 mm | 16 Amp | 230 V | 4.6 kg |
| | | 19 911 5052 | 3 x 1.5 mm ² | CH plug | 330 mm | 10 Amp | 230 V | 4.6 kg |
| Large reel | 17 m | 19 911 5150 | 3 x 1.5 mm ² | Schuko plug | 430 mm | 16 Amp | 230 V | 6.7 kg |
| | | 19 911 5152 | 3 x 1.5 mm ² | CH plug | 430 mm | 10 Amp | 230 V | 6.7 kg |

Check with an authorized CEJN distributor for availability and prices.

Spare Parts Hose Reels

Hose Assemblies


The hose in the compressed air and water reels can be replaced with new hose to further improve the service life of the reel.



| ID x OD | Length | Suitable for | Part No. |
|------------|--------|--------------------------|-------------|
| 6.5 x 10 | 9 m | 19 911 5010 | 19 911 5220 |
| 8 x 12 | 7 m | 19 911 5020 | 19 911 5219 |
| | | 19 911 1000 | 19 911 5225 |
| | | 19 911 5100 | 19 911 5218 |
| 9.5 x 13.5 | 14 m | 19 911 5120 | 19 911 5216 |
| | | 19 911 5125 - Anti-spark | 19 911 5223 |
| | | 19 911 5140 - Water | 19 911 5232 |
| 11 x 16 | 10 m | 19 911 5130 | 19 911 5221 |

Feeder Hose

The feeder hose to the compressed air and water reels can be replaced with new hose to further improve the service life of the reel.



| ID x OD | Length | Suitable for | Part No. |
|------------|--------|--------------------------|-------------|
| 8 x 12 | 2 m | 19 911 5010 | 19 911 5217 |
| | | 19 911 5020 | 19 911 5217 |
| | | 19 911 5100 | 19 911 5217 |
| | | 19 911 1000 | 19 911 5217 |
| 9.5 x 13.5 | 2 m | 19 911 5120 | 19 911 5215 |
| | | 19 911 5125 - Anti-spark | 19 911 5224 |
| | | 19 911 5140 - Water | 19 911 5231 |
| 11 x 16 | 2 m | 19 911 5130 | 19 911 5222 |

Complete your hose reel with other products from CEJN

By using CEJN only components throughout there will be no leakage and minimal pressure drop, simply because our components are designed to work together. The efficiency is improved and the compressor doesn't have to work as hard, resulting in a reduced energy consumption - which saves money and helps the environment too.

CEJN Couplings for connection, disconnection and operation without air loss, when connecting piping/hose, hose/reel and reel/tool.



| Part no. Coupling | Description | Part no. Nipple | Description |
|-------------------|-------------------------------|-----------------|-----------------------|
| 10 320 1152 | R 1/4", Male thread | 10 320 5152 | R 1/4", Male thread |
| 10 320 1202 | RG 1/4", Female thread | 10 320 5202 | G 1/4", Female thread |
| 10 320 1205 | G 1/2", Female thread | 10 320 5205 | G 1/2", Female thread |
| 10 320 3152 | Safety, R 1/4", Male thread | | |
| 10 320 3202 | Safety, G 1/4", Female thread | | |

CEJN Hoses and Hose Kits have extremely smooth internal surfaces, which contribute to a high flow rate. The use of polyurethane makes it possible to use a thin-wall design that increases the flow rate even more.



| Part no. | Description |
|-------------|--|
| 19 958 1000 | Straight braided hose, 6.5x10 mm, 100 m per roll |
| 19 958 1200 | Straight braided hose, 8x12 mm, 100 m per roll |
| 19 958 9414 | Spiral hose kit with 315 coupling and nipple, 6.5 x 10 mm, 2 m |
| 19 958 9415 | Spiral hose kit with 315 coupling and nipple, 6.5 x 10 mm, 4 m |

CEJN Filtration, Regulation, and Lubrication (FRL) range offers quality products for ensuring reliable, compressed air performance. The range includes filters, regulators, filter/regulators, lubricators and accessories. CEJN FRL products are offered in 1/8-inch through 1-inch thread connection sizes. They are easy to assemble and maintain and can be top- or side-mounted.



| Part no. | Description |
|-------------|--------------------------------------|
| 19 903 5605 | Filter/regulator, 25 µm + Lubricator |
| 19 903 5405 | Filter/regulator, 25 µm |
| 19 903 5205 | Regulator |
| 19 903 5510 | Mounting brackets |

CEJN Multi-Link System makes it easy to add more outlets in an orderly and compact fashion. For use in applications with multiple outlets, the modular air manifold system provides a neatly arranged system, ideal for both compressed air supply points in new setups and to clean up existing cluttered areas.



| Part no. | Description |
|-------------|--|
| 19 902 9932 | 2 outlets with Series 320 Safety couplings |
| 19 902 9933 | 3 outlets with Series 320 Safety couplings |
| 19 902 9972 | 2 outlets with Series 315 Standard couplings |
| 19 902 9973 | 3 outlets with Series 315 Standard couplings |

CEJN Blowguns generate a high blowing force. The blowguns have ergonomical controls and are suitable for both air and non-explosive liquids. Available in several styles, including standard full-flow, noise-reducing Star-Tip, and a pressure-regulated safety version.



| Part no. | Description |
|-------------|--|
| 11 208 0100 | Blowgun with 90 mm fixed tube |
| 11 208 3100 | Blowgun with 90 mm fixed safety tube, Star Tip |
| 11 208 0200 | Blowgun with 90 mm removable tube |

CEJN Adapters include a wide range of hose connectors for maximum flexibility in a variety of applications; male-to-male adapters; bushings; plugs; cross, T-, L-, and Y-pieces; and ball valves.





The Global
Quick Connect Specialist

